

Grafix Extra Textile Film



For Tough Textiles Such As Nylon

Grafix Extra is a tough thermoweldable computer cut material for application on any type of “tough” textiles. For use on nylons (nylon jackets, K-Way, nylon sports wear and bags), umbrellas, leather etc.

Application Instructions

- 1 Remove protective liner first**
- 2 Cut in REVERSE**
- 3 Heat apply for 2 - 4 second with its own polyester backing**
- 4 Remove backing when cold**
- 5 Cover with silicon treated paper or teflon**
- 6 Heat apply for a further 10 seconds**


Due to the many different base materials available on the market, the following heat transfer instructions are given as guideline only:

Temperature: 160°C
Pressure: Low

Time: 2-4 sec. + 10 sec.
Washable to: 60°C

These are the manufacturers guidelines but we have found that it is preferable to leave the polyester backing for the whole application.

Colours

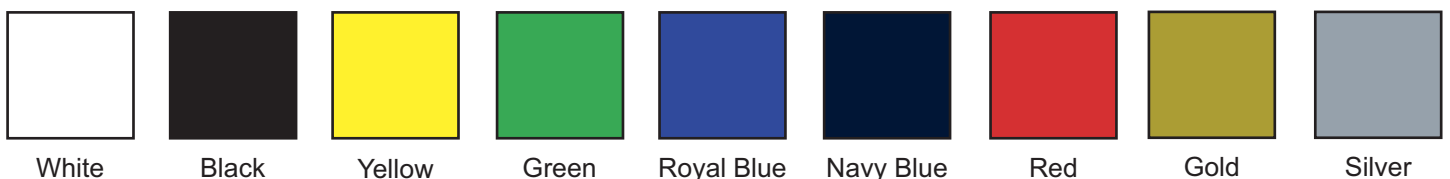

These colours are given as indication. Please refer to the samples to check the exact colours


GRAFITYP

Grafitack House, 103 Mariner, Lichfield Rd,
Industrial Est., Tamworth, Staffs, B79 7UL

01827 300500

Fax: 01827 51333 | E-mail: sales@grafityp.co.uk | www.grafityp.co.uk