

Graflex PS Textile Film



With Self Adhesive Backing

PVC free material for Cad Cut® applications. Much thinner than standard Graflex, also has other successful characteristics: high washing resistance, easy cutting, weeding and application. Because of its thinness, excellent performance can be achieved with multi-layered applications. Polyester backing. Suitable for **100% cotton, 100% polyester, poly-cotton** blends and most synthetic fabrics

We highly recommend application and washing test

Application Instructions


- 1) **Cut in REVERSE**
- 2) **Heat apply**
- 3) **Remove polyester backing when HOT**

Due to the many different base materials available on the market, the following heat transfer instructions are given as guideline only:

Temperature: 150°C
Pressure: low

Time: 10 – 15 sec.
Washable to: 80°C

Colours

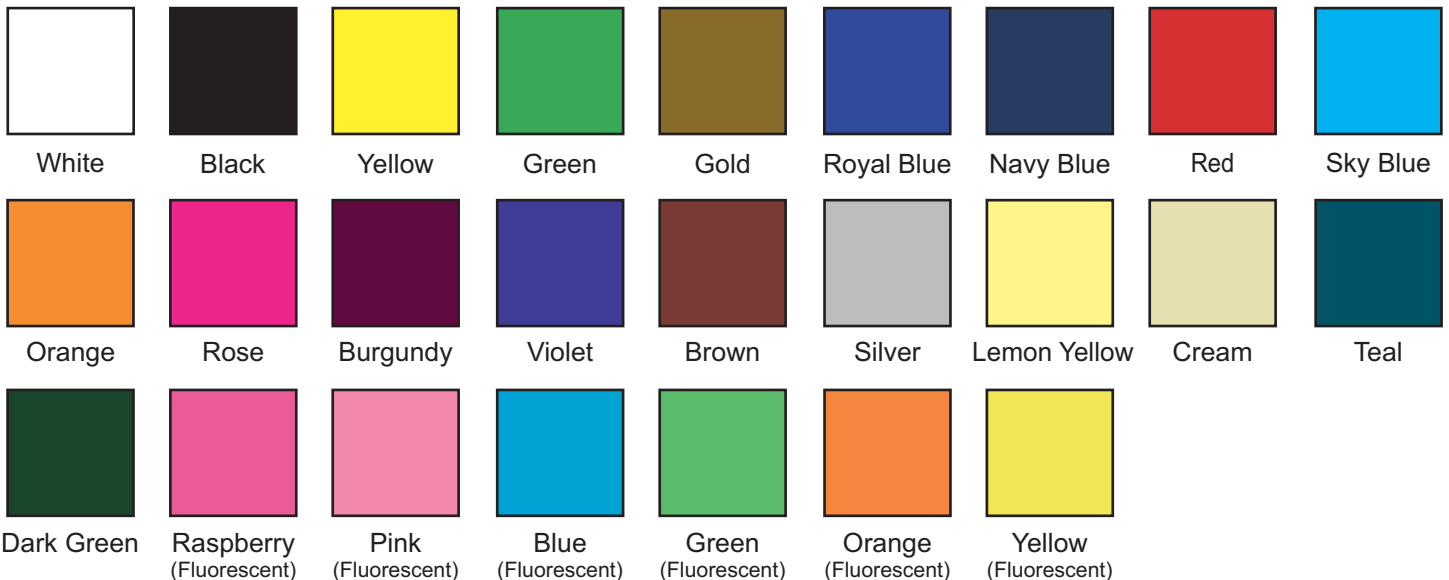

These colours are given as indication. Please refer to the samples to check the exact colours

GRAFITYP

01827 300500

Grafitack House, 103 Mariner, Lichfield Rd,
Industrial Est., Tamworth, Staffs, B79 7UL

Fax: 01827 51333 | E-mail: sales@grafityp.co.uk | www.grafityp.co.uk