

Grafiflex PU Textile Film



Thinner Film Ideal For Multi-Layering

Grafiflex PU textile vinyl is a thermoweldable PVC FREE material for cut applications on to non-siliconized textiles. The material is much thinner than standard Grafiflex material, also having these other characteristics: high washing resistance, easy cutting, weeding and application. Because of the thinness of the material, excellent performance can be achieved with multi-layered applications.

Application Instructions


- 1) **Cut in REVERSE**
- 2) **Heat apply with its own polyester backing**
- 3) **Remove polyester backing when cold**

Due to the many different base materials available on the market, the following heat transfer instructions are given as guideline only:

Temperature: 150°C
Pressure: low

Time: 10 – 15 sec.
Washable to: 80°C

Colours

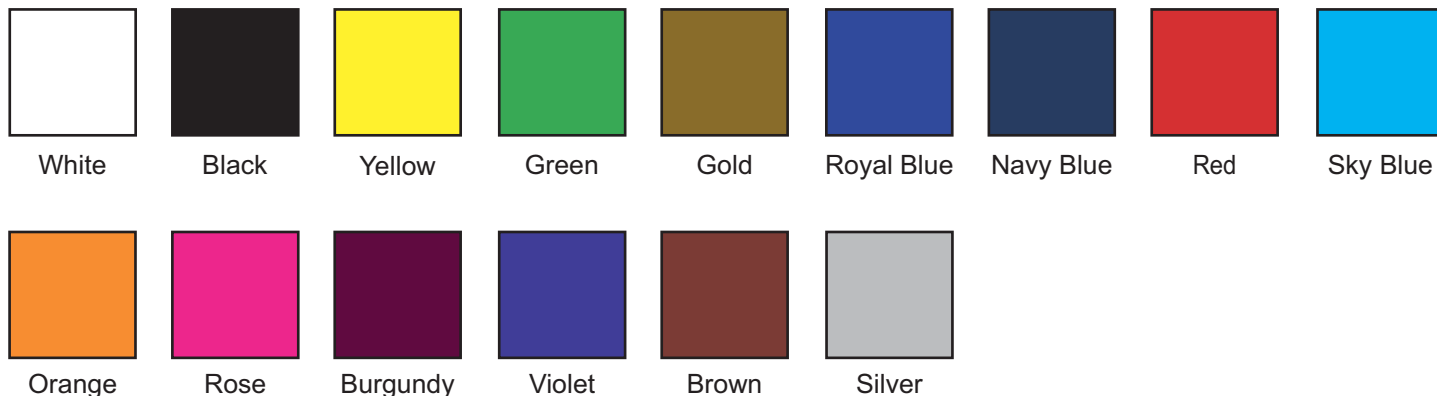

These colours are given as indication. Please refer to the samples to check the exact colours



Grafitack House, 103 Mariner, Lichfield Rd,
Industrial Est., Tamworth, Staffs, B79 7UL

01827 300500

Fax: 01827 51333 | E-mail: sales@grafityp.co.uk | www.grafityp.co.uk