

www.Grafityp.com

REACHCONFORM



Max Touch

Customer Centre



The Grafitack Translucent series is a top quality range of translucent polymeric calendered PVC films for long term outdoor applications (5 to 7 years).


The Grafitack Translucent series is supplied on a 120 gram silicone paper. A high-quality solvent based permanent acrylic adhesive guarantees perfect adhesion on most kinds of surfaces.

The Grafitack Translucent series was developed for back-lit advertising, and can be used for numerous applications such as on light boxes and also on most flexible sign faces.

An optimum colour brightness is obtained due to a perfect and regular colouring of the vinyl. The high UV-resistance of this vinyl guarantees beautiful illuminated advertising by day as well as by night, year after year.

Properties	Method (unit)	Translucent series
Thickness	ISO 4593 (μm)	80
Elongation at break in length direction	Din53455	> 130
Elongation at break in cross direction	(percentage)	> 150
Dimensional stability	Finat 14	< 0,40
mounted on aluminium (10 x10 cm)	(percentage)	
Degree of gloss	Din67530	min. 25/max 35
	(gloss units)	(meas.angle 85°)
Adhesion strength after 20 minutes	Finat 1	16
Adhesion strength after 24 hours	(N/25mm)	20
Quickstick	Finat 9	11
	(N)	
Outdoor life span (in Central European conditions)		Adhesion 7 years, colours 5-7 years
TL900, TL901		3 years
Temperature range at application		+10°C to + 40°C
Temperature range at use		-20°C to + 70°C
Flammability	when applied to aluminium, glass, steel: self-extinguishing	



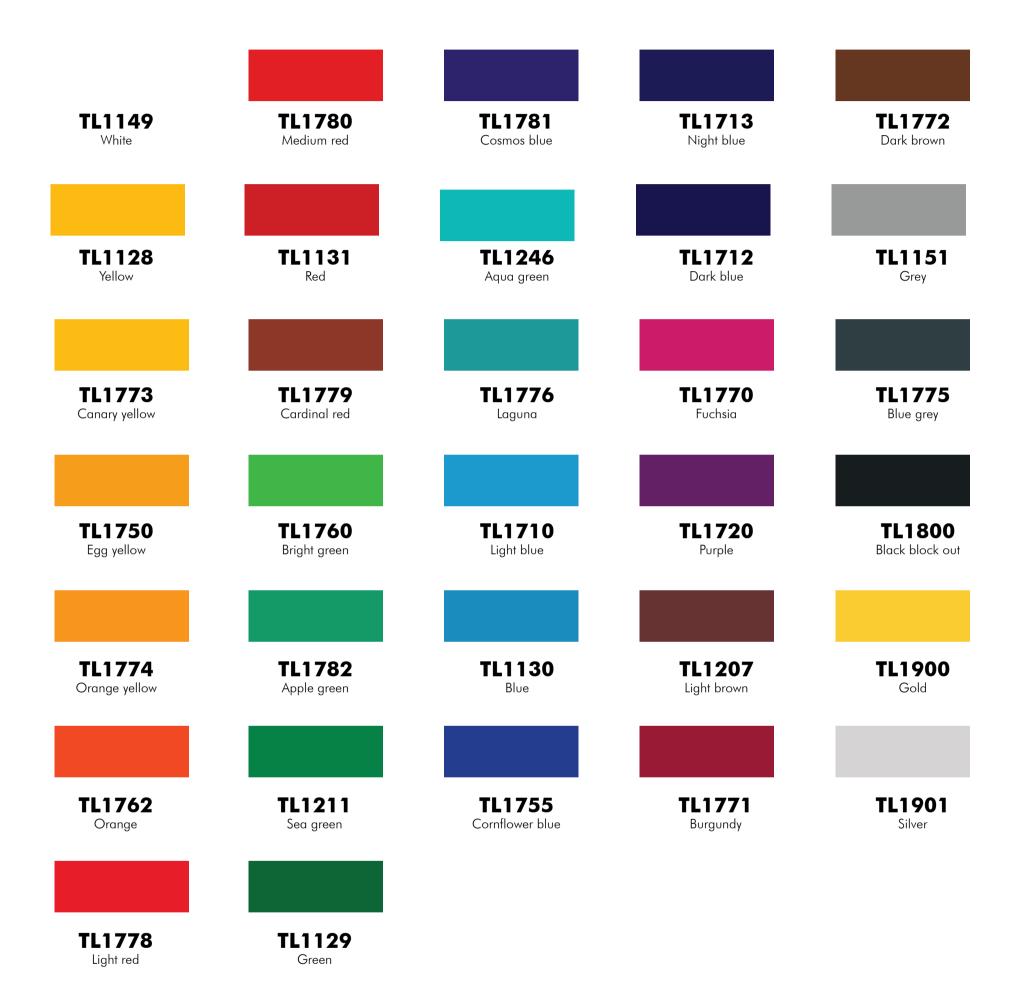







Head Office : Sub in:

Grafityp Selfadhesive Products Grafityp

Grafityp Selfadhesive Products
Offices Stationsstraat 43

Plant & Logistics Centrum Zuid 1539 B-3530 Houthalen-Helchteren BELGIUM

T. +32(0)11-600 850 F. +32(0)11-526 232 U.K. Ltd
Grafitack House 103 Mariner
Tamworth/Staffordshire
B79 7UL UNITED KINGDOM
T. +44(0)1827 300500
F. +44(0)1827 51333