

# GRAFITYP

UK Limited

## GRAFIPRINT PRODUCT OVERVIEW

---

---

RENEW YOUR FURNITURE  
Interior Wrapping

---

Tel: 01827 300500

Web: [www.grafityp.co.uk](http://www.grafityp.co.uk)

# Furniture Wrapping

In this manual you will find a couple of possibilities of how this work can be done. Using the right techniques, an old table or door will be up-to-date again in no time!

## Tables with right corners

### Preparation



Clean the table with Isopropanol.



Don't forget the vertical edges.



Next, clean the table with a surface cleaner.



You will need: a heatgun, knife, soft squeegee and a meter.

---

### Positioning the film




Position the film on the table surface ensuring it's 10cm oversized.



Next, pull away the backing paper.

---

## Applying the film

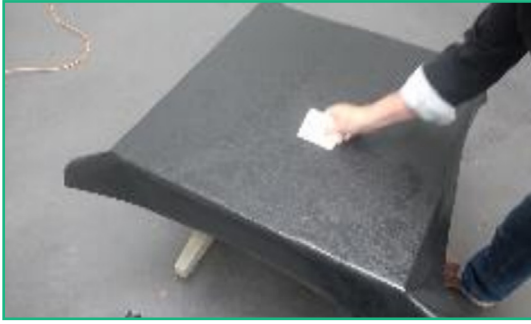

Apply pressure to the film from the center outwards with a squeegee.



Accentuate the edges with your finger.

## Wrapping Edges

### Wrapping edges with overlap



Apply pressure to the vertical sides in a downwards direction.



Next, apply pressure to the film 0.5cm around the corner.



Begin cutting the film at the top of the edge.



Cut the film downwards.



Apply pressure to the 0.5cm, wrapping it around the corner.



Now, begin applying pressure on the other edge in a downward direction.



Use the edge as a guide line to cut away the remaining, excess film.



Now, cut away the excess, overhanging film towards the edge of the table.



Use a heat gun at 350°C and firmly apply pressure to all edges.



Press firmly ensuring all edges are secure.



The 3mm overlap is required and will be slightly visible.



# Wrapping Edges

## Wrapping edges without an overlap



Ensure your film is at least 10cm oversized at all edges of your table surface.



Pull away the backing paper.



Apply pressure to the film outwards with a squeegee. Then accentuate the edges with your squeegee or finger.




Later the seams will touch each other here.



Mark a new line 3mm under the first one and cut the film there.



The film should now be 3mm oversized.

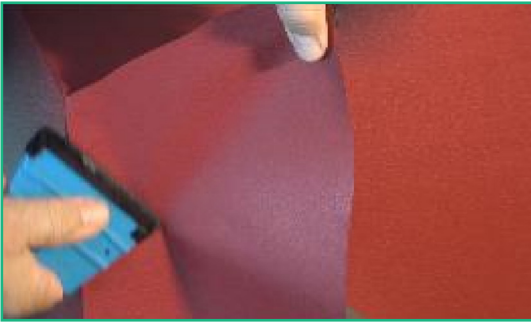

Now start applying pressure to the other side.



Mark the final cutting line from top edge to the bottom edge.



Now, cut through both films.



Pull away both pieces of excess vinyl.



Now firmly apply pressure with your squeegee pressing both pieces together.