vivid.

easymount. SIGN

WIDE FORMAT LAMINATING SYSTEM

Easymount Sign is designed to perform and built to last.

KEY FEATURES

- Up to 5m/16ft a minute
- Heat Assist & Cold options available
- 25mm/1" mounting thickness
- Large diameter rollers
- Variable speed control
- Built-in media take-up unit
- Self gripping mandrels
- Magic eye safety feature
- Heated roller
- Single lift mechanism
- Heavy duty construction
- Release liner take-up
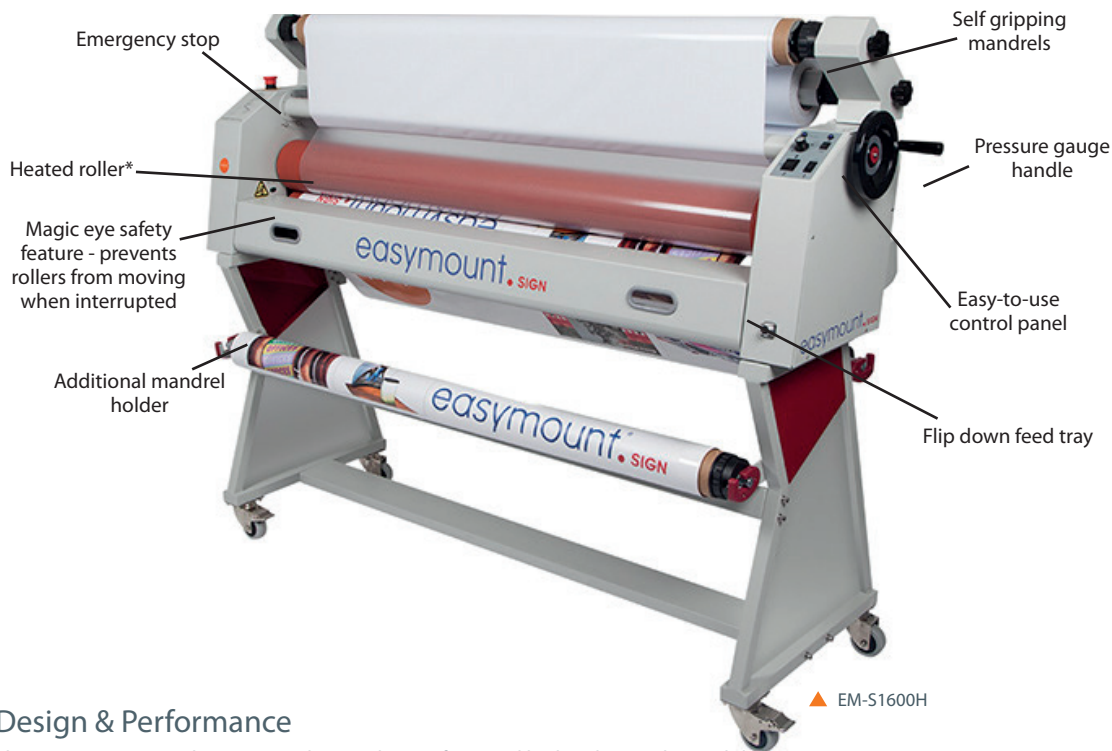- Handy reverse mechanism
- Foot pedal

GREAT FOR USE IN

- Sign makers
- Print finishers

IDEAL WHEN LAMINATING

- Single banners
- Reel-to-reel laminates
- Posters, graphics and signs
- Mounting prints to boards
- Pop-up displays
- Applying vinyls, tapes and adhesive films
- Outdoor signage

and many more...

Emergency stop

Self gripping mandrels

Heated roller*

Pressure gauge handle

Magic eye safety feature - prevents rollers from moving when interrupted

Easy-to-use control panel

Additional mandrel holder

Flip down feed tray

▲ EM-S1600H

Design & Performance

This Easymount® Sign laminator is designed to perform and built to last, with its solid heavy duty construction.

An easy-to-use laminating system with self gripping mandrels and a flip down feed tray.

The Easymount® Sign includes an integral media take-up unit, making the system ideal for single banners or reel-to-reel laminating up to 50m.

The Easymount® Sign is available as a hot or cold option, in both 1.4m and 1.6m widths.

*Heated roller available on EM-S1400H & EM-S1600H models.

INCLUDES

- **BUILT-IN MEDIA TAKE-UP UNIT**
- **SELF GRIPPING MANDRELS**
- **SINGLE LIFT MECHANISM**

Specifications	Heat Assist		Cold	
	EM-S1400H	**EM-S1600H**	**EM-S1400C**	**EM-S1600C**
Laminating Speed (m/ft/min)	up to 5m/16ft	up to 5m/16ft	up to 5m/16ft	up to 5m/16ft
Max. Width (mm/inches)	1420mm/56"	1620mm/64"	1420mm/56"	1620mm/64"
Mounting Thickness (mm/inches)	25mm/1"	25mm/1"	25mm/1"	25mm/1"
Roller Diameter (mm/inches)	130mm/5"	130mm/5"	130mm/5"	130mm/5"
Laminating Temperature (°C/°F)	45°C/113°F - can be switched off	45°C/113°F - can be switched off	-	-
Pressure Adjustment	Manual	Manual	Manual	Manual
Film Core (mm/inches)	77mm/3"	77mm/3"	77mm/3"	77mm/3"
Power Supply AC (V–Hz)	220/240–50-60	220/240–50-60	220/240–50-60	220/240–50-60
Power Consumption (W)	1000	1200	38	38
Overall Dimensions (mm/inches)	1846x550x1365mm 73x22x54"	2046x550x1365mm 81x22x54"	1846x550x1365mm 73x22x54"	2046x550x1365mm 81x22x54"
Gross Machine Weight (Kg/lbs)	136Kg/300lbs	156Kg/344lbs	136Kg/300lbs	156Kg/344lbs
Gross Stand Weight (Kg/lbs)	25Kg/55lbs	30Kg/66lbs	25Kg/55lbs	30Kg/66lbs
Warranty*	1 year	1 year	1 year	1 year

*For full terms & conditions on parts and labour warranty, visit vivid-online.com/support/warranty_information

Web: www.grafityp.co.uk
Tel: 01827 300500
E-mail: sales@grafityp.co.uk

GRAFITYP
UK Limited