

UK-REF. M113HT (High Tack Adhesive)

Description

GrafiPrint M113HT is a soft monomeric cadmium free calendared white matt finish PVC film, especially developed for general printed graphic applications. The 100-micron thickness film allows for easy application onto various surfaces and is good for slightly structured surfaces like wall or plasterboard. It is supplied on a quality backing liner with a clear pressure sensitive high tack adhesive.

Printing

- Suitable for use with a wide variety of inks including Solvent, Eco solvent, Latex and UV (Print test first if unsure)
- Always use an appropriate printing profile. Many profiles are available from www.grafityp.com & www.grafityp.co.uk
- Avoid touching the face of the film, this will elevate any possible unwanted media contamination.
- Allow the material to climatize to room temperature before starting printing.

Finishing

- Ensure the print has fully dried and gassed before over laminating and allow drying ideally before cutting
- Suitable for flat type applications for short to medium term. Not suitable for complex curves or applications, avoid stretching.
- Always ensure the application surface is clean and suitable for the chosen media (If unsure test)

Product Specification

Technical properties tested at a relative humidity of $50 \pm 5\%$ and a temperature of $23 \pm 2^\circ\text{C}$.

Printable surface

Film: Monomeric Calendared PVC 100 microns
Film including backing sheet and glue 245µ
Elongation at break 190% max

Adhesive

Solvent free grey acrylic adhesive
Adhesive strength at 20min 18N/25mm
Adhesive strength at 24 hours 24N/25mm
Quickstick strength 12N

Finish

Matt finish

Warranty Conditions.

UK based type climate
Application variations may alter durability

Fire Rating

B-s1,d0 (EN 13501-1)

Animal Derived Ingredients

None - this product is Vegan

Durability

2-year shelf life
Up to 4-year external durability (unprinted)
Please refer to ink manufacture for durability of the printed job.

Flammability

Self-extinguishing when applied to aluminium
REACH and RoHS compliant

Available sizes

1525mm x 50m
1370mm x 50m
1050mm x 50m
762mm x 50m
500mm x 50m

Application temperature

+10°C to +35°C in application
-15°C to +60°C in use

Storage: All GrafiPrint materials always need to be stored in their original packing and with the original protection flanges (and preferably stored vertically). In order to avoid any loss of quality, the GrafiPrint media should also be stored in suitable conditions, that is at a temperature between 10 and 20°C, and a relative humidity of 50 %.

Warranty: Grafityp UK warrants that materials used will remain in expected condition without excessive dis-colouration for the specified lifetime of the ink used, if used in accordance with the conditions and guidelines given in the zone life expectance pdf. Durability is based on vertical application under normal UK and Northern European type conditions. If this should not be the case Grafityp will provide sufficient replacement materials to allow replacement of the original work. The user is responsible in ensuring that the materials are handled and stored as per specification, it is the user's responsibility to insure the product is suitable for the desired application. Grafityp does not and will not except any consequential loss or damage and will not provide support for any material misuse or negligence.

All the above data is given in good faith. The seller will not be liable for any damages in excess of the original purchase price nor any consequential or incidental loss.

Expected Durability of Grafityp Films

Introduction

The life or durability of Grafityp films are shown as the expected performance of the products when used under normal conditions considering variables such as Geographical location, altitude, vertical exposure etc. Within the below document we have used typical exposure for an expected vertical application under Zone one climate type conditions. *(Zone one contains the UK along with other countries of a similar geographical positions and climate type)*

We refer just to the materials supplied unmodified and not to any subsequent *inks or additions to the base material. We depict that the material will remain in a satisfactory condition and effective for the initial required application to the stated durability expected.

(* For ink life expectancy please refer to the ink manufacturer technical specification)

Reduction in durability

There are several factors that can reduce the specified life expectancy of any exterior film. The life of all materials is based on a vertical application, anything other than this can be of detriment to the materials used. Therefore, vertical application is classed as anything up to 10 degrees off vertical. For any application of more than +10 degrees off vertical the life expectancy will be dramatically reduced in most cases by x 0.5. Graphics applied at near horizontal application and/or southerly facing exposure are widely regarded as at high risk of degradation and therefore reduced in life expectancy dramatically in most normal applications.


Exposure angles greater than from vertical 10 degrees will affect the durability of films.

Applications of greater than 70 degrees are treated the same as full horizontal applications

Grafityp Laminates may help on Printed media

The more a graphic vies away from vertical the more potential damaging exposure it is subject to.

The altitude and even the levels of pollution in the area are also factors that can contribute to the expected durability of a film being reduced.

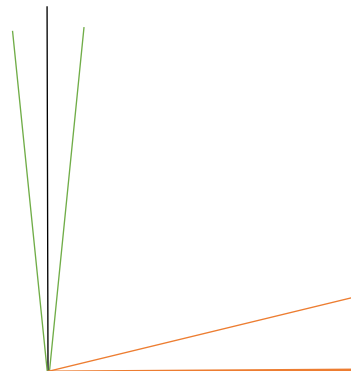

Conversion factors by area:

Zone One. The expected life within this zone is:
Vertical application (as per TDS sheet)

Expected durability is the reference for jobs applied in the horizontal position located in the zone 1 geographical group. The actual performance can be affected by a variety of outside factors including but not limited to, the substrate, the angle of application and direction of exposure, the application method and the surrounding environment. The expected external durability shown in the relevant specification sheet is the period that the product should, but is not warranted to, last when applied in a manner conforming to our reference. The time shown is the expected life of the product, is not a minimum life expectancy when applied under normal type conditions