



Eye catching metallic, reflective and glittering vinyls for cut lettering applications and printed graphics.

VinylEfx

Available in both Indoor Decorative and Outdoor Durable series (<3 years outdoors) with permanent adhesive

Easy application to flat, smooth surfaces – dry application only

Cuts and weeds easily

Apply cut letters with a high tack application tape, such as RTape® Conform® 4075RLA or 4775RLA or Clear Choice® AT65 or AT75.1. For digitally printed and UV screen printed wide format graphics, use a medium tack tape, such as RTape® Conform® 4760RLA application tape

Allow for 6 mm border around the edges of printed graphics

Overlaminates can be used if extra protection is required

Print Compatibility: (Eco-)Solvent, UV, Screen, Latex

Applications

Point-of-Purchase posters

Tradeshow graphics

Retail display


Decorative signage

Vehicle graphics

Window show designs

PRODUCT OVERVIEW ▶

● Indoor Decorative: Roll Width (mm) | ■ Outdoor Durable: Roll Width (mm)

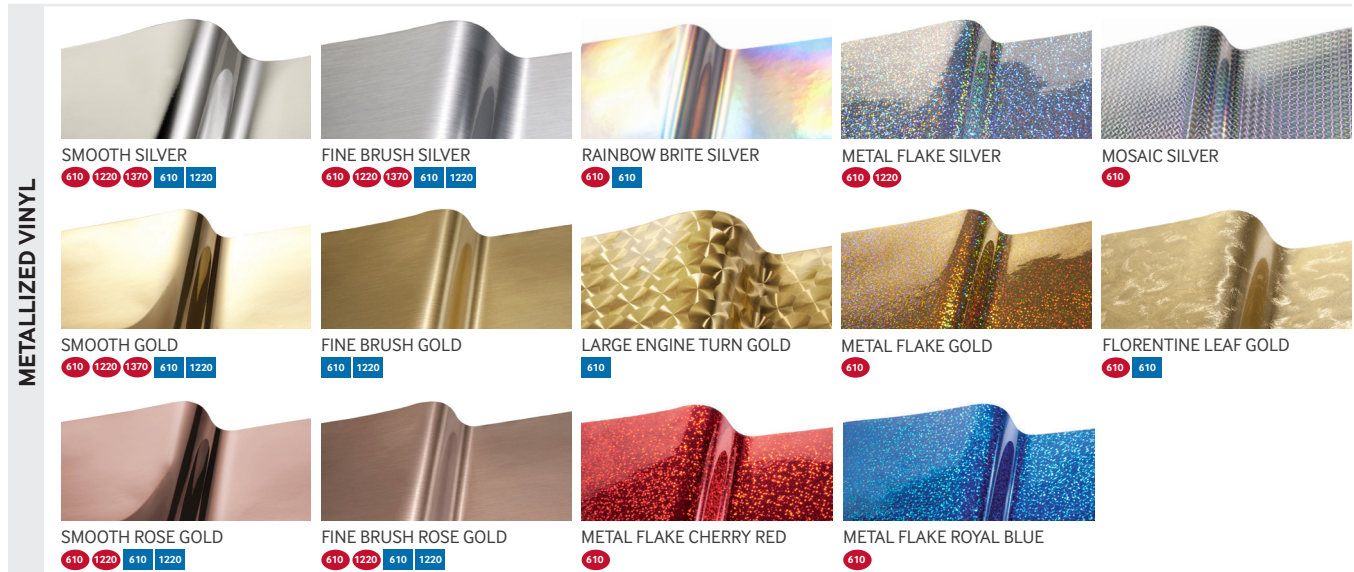

		610mm x 45.7m	1220mm x 45.7m	1370mm x 45.7m
Pattern	Colour	Stocked Sizes		
Smooth	Silver	● ■	● ■	●
	Gold	● ■	● ■	●
	Rose Gold	● ■	● ■	
Fine Brush	Silver	● ■	● ■	●
	Gold	■	■	
	Rose Gold	● ■	● ■	
Rainbow Brite	Silver	● ■		
Mosaic	Silver	●		
	Silver	●	●	
Metal Flake	Gold	●		
	Cherry Red	●		
	Royal Blue	●		
	Royal Blue	●		
Florentine Leaf	Gold	● ■		
	Gold	■		



Pattern/Colour	SKU#	Size
Indoor Decorative		
Smooth Silver	VX1764-24150	610mm x 45,7m
	VX1764-48150	1220mm x 45,7m
	VX1764-54150	1370mm x 45,7m
Smooth Gold	VX2293-24150	610mm x 45,7m
	VX2293-48150	1220mm x 45,7m
	VX2293-54150	1370mm x 45,7m
Smooth Rose Gold	VX5439-24150	610mm x 45,7m
	VX5439-48150	1220mm x 45,7m
Fine Brush Silver	VX6770-24150	610mm x 45,7m
	VX6770-48150	1220mm x 45,7m
	VX6770-54150	1370mm x 45,7m
Fine Brush Rose Gold	VX5003-24150	610mm x 45,7m
	VX5003-48150	1220mm x 45,7m
Rainbow Brite Silver	VX3138-24150	610mm x 45,7m
Mosaic Silver	VX8241-24150	610mm x 45,7m
Metal Flake Silver	VX2716-24150	610mm x 45,7m
	VX2716-48150	1220mm x 45,7m
Metal Flake Gold	VX5186-24150	610mm x 45,7m
Metal Flake Cherry Red	VX8833-24150	610mm x 45,7m
Metal Flake Royal Blue	VX7319-24150	610mm x 45,7m
Florentine Leaf Gold	VX1754-24150	610mm x 45,7m

Pattern/Colour	SKU#	Size
Outdoor Durable		
Smooth Silver	VX9809-24150	610mm x 45,7m
	VX9809-48150	1220mm x 45,7m
Smooth Gold	VX9387-24150	610mm x 45,7m
	VX9387-48150	1220mm x 45,7m
Smooth Rose Gold	VX4577-24150	610mm x 45,7m
	VX4577-48150	1220mm x 45,7m
Fine Brush Silver	VX4126-24150	610mm x 45,7m
	VX4126-48150	1220mm x 45,7m
Fine Brush Gold	VX6582-24150	610mm x 45,7m
	VX6582-48150	1220mm x 45,7m
	VX3922-24150	610mm x 45,7m
Fine Brush Rose Gold	VX3922-48150	1220mm x 45,7m
	Rainbow Brite Silver	VX1488-24150
Large Engine Turn Gold	VX8966-24150	610mm x 45,7m
Florentine Leaf Gold	VX1566-24150	610mm x 45,7m

610/1220mm x 10/228m roll variations are available upon request.

TECHNICAL DATA ▶

		Indoor Decorative	Outdoor Durable
Physical Properties			
Finish		Various - See Chart	Various - See Chart
Colour		Various - See Chart	Various - See Chart
Adhesive		Clear permanent acrylic	Clear permanent acrylic
Film		Metallized PVC	UV-resistant metallized PVC
Liner		143 gsm one side PE-coated white kraft paper	143 gsm one side PE-coated white kraft paper
Opacity		2,2 minimum	2,2 minimum
Thickness	Film	75 microns	75 microns
	Film + Adhesive	100 microns	100 microns
Adhesion*	Stainless Steel	28 N/100 mm	Good adhesion to a wide variety of signs
Weight	Film + Adhesive	127 - 142 gsm	127 - 142 gsm
	Total w/ Liner	270 - 290 gsm	270 - 290 gsm

		Indoor Decorative	Outdoor Durable
Conditions for Use			
Shelf Life		1 year	1 year
Outdoor Durability		Indoor use only	Up to 3 years*
Min Application Temp		4° C	4° C
Service Temp Range		-29° to 55° C	-29° to 55° C
Solvent Resistance		Yes	Yes
Water Resistance		No	No**

*Note: To ensure optimum service life, we recommend that all exterior applications are edge sealed (with a graphic edge sealer)

**Edge sealing is recommended in high solvent exposure areas

The information provided herein is correct to the best of Nekoosa's knowledge. No liability for any errors, facts or opinions are accepted. Customers must satisfy themselves as to the suitability of this product for their application. No responsibility for any loss as a result of any person placing reliance on any material contained herein will be accepted.