


Product Information

Dry Wipe PET Laminate

Features & Advantages:

- High gloss whiteboard with PSA adhesive back, perfect for whiteboard marker and dry-erased.
- With lower initial adhesion and non-carrier design, PSA adhesive adheres on mostly smooth surface easily, and sticks firmly after fixed and not removable.
- Premium PET base, good weather resistance, excellent for durable indoor using.

CONSTRUCTION DRAWING:

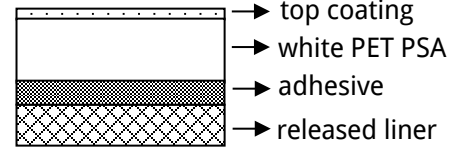

Specification:

| | |
|---------------------------|---------------|
| Total thickness | 220μm (±22) |
| Weight | 255g/M2 (±25) |
| Whiteness | [80, 90] |
| Gloss 60° | [90, 110] |
| Water resistance | High |
| UV resistance | Medium |
| Relative high temperature | |
| Operating ranges: | |
| Long term (days, weeks) | 60°C |
| Short term (minutes) | 100°C |

Rewritable Data:

- Rewritable Useful Time: 20000 times (tested with the whiteboard writing testing machine under ambient temperature and humidity)
- Erase Limitation: For normal whiteboard marker pen, marks can be dry erased off within one month. If the marks leave on a whiteboard for long enough and can't be dry erased, please use Whiteboard Cleaner or some alcoholic liquid to get them off.

PROCESS AND STORAGE:

- Working condition: temperature 15°C to 30°C, and relative humidity 30% to 60%.
- Application condition: temperature change is within 40°C daily.
- Storage condition: closed preserve avoiding sunlight, in temperature 10°C to 35°C, relative humidity 20% to 70%
- Shelf life: 12 months under storage condition. Unfinished material should be seal-packed well.

ADHESION DATA:

| | |
|--------------|----------------------|
| INITIAL | |
| ADHESION | GB/T4852-2002 ≤100mm |
| ROLLING BALL | 7#steel ball |

NOTICE:

- Surface to be covered must be clean, smooth, dry, and structurally sound, not contain loose paint, nail head, nicks, gouges, or other surface imperfections.